


CARTRIDGE HEATER SPEC

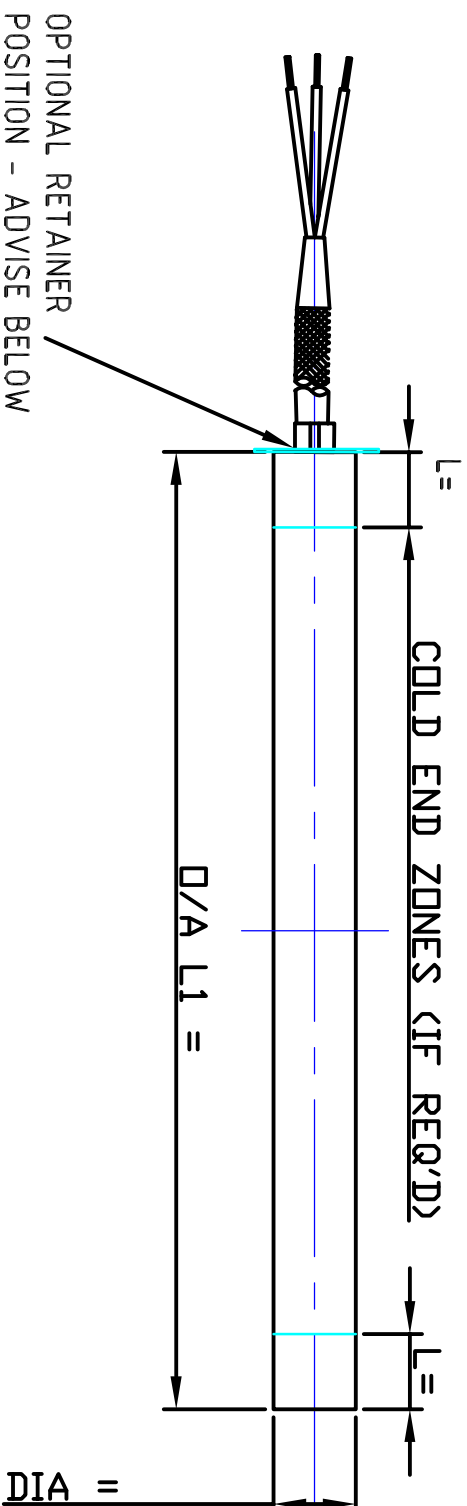

TUBE DIA: _____ TUBE LENGTH: _____ INTERNAL COLD ENDS(IF APPLICABLE): LEAD END _____ OTHER END _____

ADDITIONAL INFO:

POWER DENSITY:HIGH WATT(35W/CM) _____ MEDIUM WATT (15W/CM) _____ LOW WATT (5W/CM) _____

WATTAGE _____ | SUPPLY TYPE: SINGLE | DUAL | 3 PHASE SUPPLY VOLTAGE: _____

TERMINATION: PLAIN NICKEL PINS|THREADED TERMINAL PINS (STATE THREAD) _____ | LEADS - OPTIONS BELOW

LEAD DETAIL: LENGTH _____ PLAIN FIBRE GLASS | TEFLON | SILICONE | STEEL BRAIDED | STEEL CONDUIT

THERMOCOUPLE REQ'D: NONE | TYPE J | TYPE K THERMOCOUPLE GROUND POINT POSITION: _____

RETAINERS: THREADED FLANGE -STATE THREAD & LENGTH _____ WASHER/PLATE - STATE SIZES _____