


CUSTOMER: _____

NAME: _____

CONTACT: _____

DIE REF #/NAME: _____

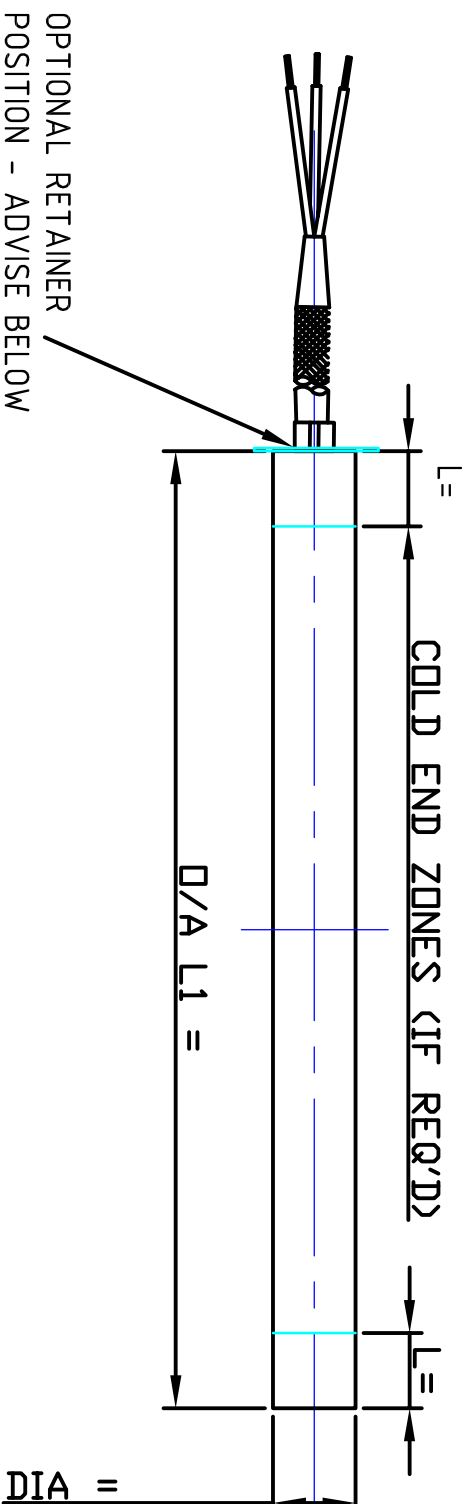

TUBE DIA: _____ TUBE LENGTH: _____ INTERNAL COLD ENDS(IF APPLICABLE): LEAD END _____ OTHER END _____

POWER DENSITY: HIGH WATT(35W/CM) _____ MEDIUM WATT (15W/CM) _____ LOW WATT (5W/CM) _____

WATTAGE _____ | SUPPLY TYPE: SINGLE | DUAL | 3 PHASE SUPPLY VOLTAGE: _____

TERMINATION: PLAIN NICKEL PINS | THREADED TERMINAL PINS (STATE THREAD) _____ | LEADS - OPTIONS BELOW

LEAD DETAIL: LENGTH _____ PLAIN FIBRE GLASS | TEFLON | SILICONE | STEEL BRAIDED | STEEL CONDUIT

THERMOCOUPLE REQ'D: NONE | TYPE J | TYPE K THERMOCOUPLE GROUND POINT POSITION: _____

RETAINERS: THREADED FLANGE - STATE THREAD & LENGTH _____ WASHER/PLATE - STATE SIZES _____

ADDITIONAL INFO:

